


ELASTIC SUPPORT SILENTIUM AE48



The elastic support SILENTIUM AE48 is an accessory destined to guarantee the elastic connection of gypsum board partitioned walls (executed with amounts of 48 mm) faced with structural elements as slabs, whether it's pavement, ceiling and even masonry walls (in the case of wall duplication).

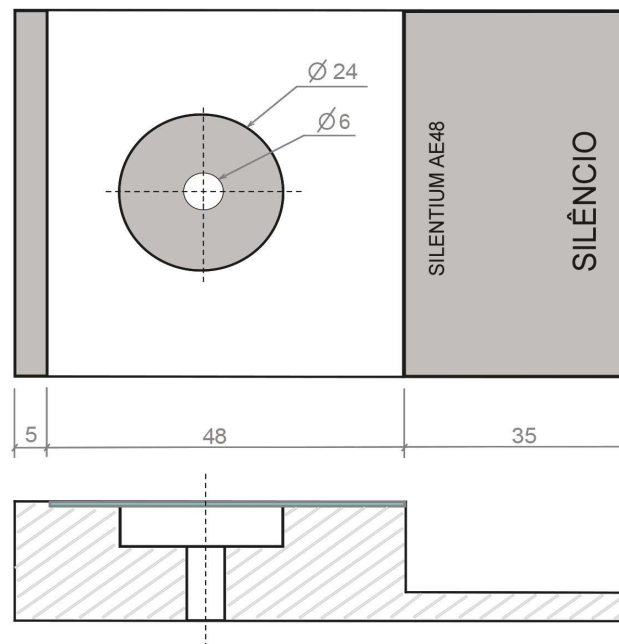

MAIN TECHNICAL CHARACTERISTICS


Base material / damper: Black rubber with hardness Shore "A" 40 +- 5

Connection material: Vulcanized steel sheet with 1mm of thickness

Typical application on pavement: From 60 to 60 cm

TYPICAL APPLICATIONS

Elastic support of gypsum board walls, especially using the system with the amount and bridge of 48 or 50 mm.

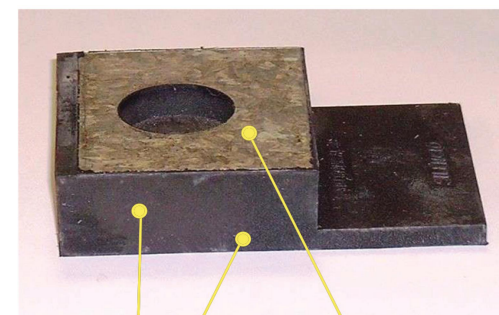

Resilient element
in the structure's
connection

Vulcanized sheet in
connection with the
gypsum board's bridge